


Batch Centrifugal Machine

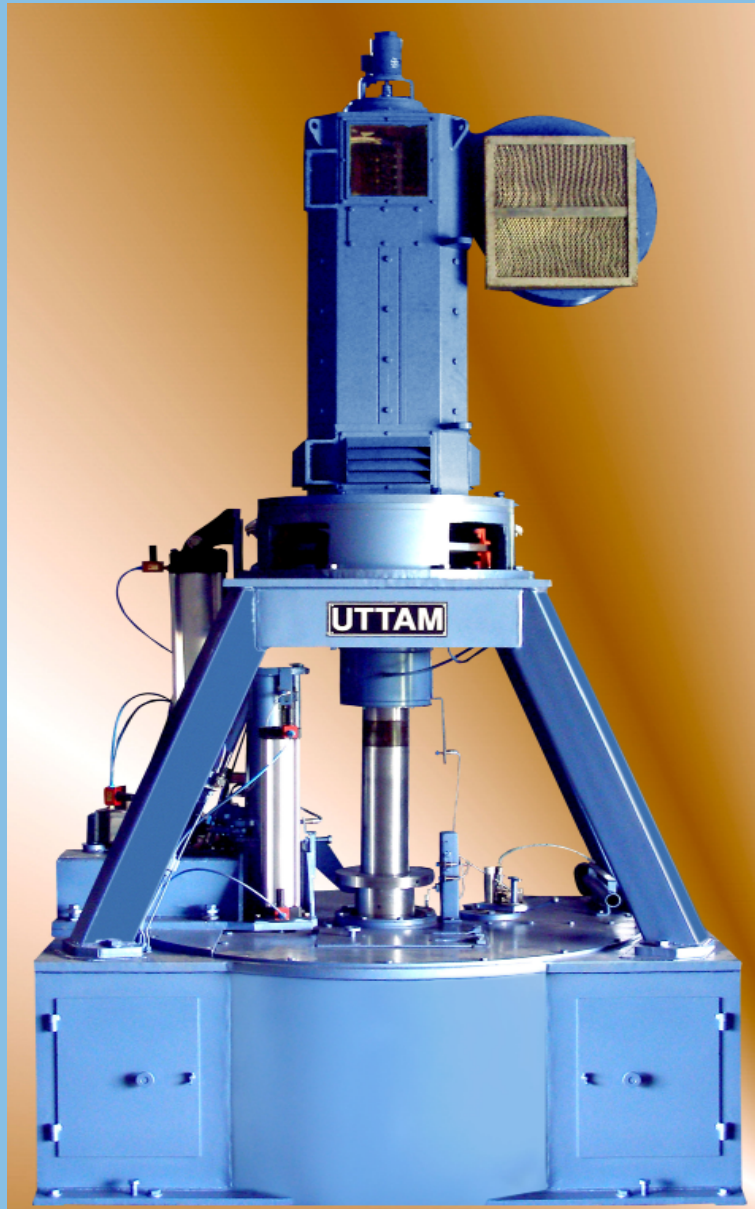

Automatic

UTTAM Automatic Batch centrifuges are designed to give reliable, efficient, cost-effective performance throughout the crushing season for Raw-White and refined Sugar alike.

Technical Specifications

	G-750	G-1250	G-1750
Center to center Distance in a battery	1750mm	2000mm	2200mm
Slot Size of Working Screen	0.37x4.00 mm	0.37x4.00 mm	0.37x4.00 mm
Basket Diameter			
Inside Height	760 mm	940 mm	1060 mm
Inside Diameter	1220 mm	1370 mm	1700 mm
Massecuite Thickness	190	230	225
Quantity / Charge	750Kg	1250 Kg	1750 Kg
Nominal curing Speed	1250rpm	1200rpm	1050 rpm
No of Cycles	18-20	18-20	18-20
Quantity of massecuite cured	13.5-15 T/Hr.	22-25 T/Hr.	32-35 T/Hr.

The Standard Type Foundry P. Ltd.

A-11, Meerut Road Industrial Area

Ghaziabad-201002, U.P., India

Tel : 0120 - 4165797 ; 9971878844

www.uttamcentrifuges.com

Email :- sales@uttam.co.in